

Robust Statistics in IceCube Initial Muon Reconstruction

The IceCube Collaboration 1 , B. Recht 2 , C. Ré 2

mwellons@cs.wisc.edu

Abstract: In the IceCube Neutrino Detector, muon tracks are reconstructed from the muon's light emission. The initial track "linefit" reconstruction serves as a starting point for more sophisticated track fitting, using detailed knowledge of the ice and the detector. The new approach described here leads to a substantial improvement of the accuracy in the initial track reconstruction for muons. Our approach is to couple simple physical models with robust statistical techniques. Using the metric of median angular accuracy, a standard metric for track reconstruction, this solution improves the accuracy in the reconstructed direction by 13%.

Corresponding authors: M. Wellons¹

¹ Computer Sciences Department, University of Wisconsin, Madison

Keywords: Icecube, Muons, Track Reconstruction.




Fig. 1: The IceCube neutrino detector in the Antarctic ice. A picture of the Eiffel Tower is shown for scale.

1 Introduction

2

6

8

10

11

12

13

14

The IceCube neutrino detector searches for neutrinos that ³⁷ are generated by the universe's most violent astrophysical ³⁸ events: exploding stars, gamma ray bursts, and cataclysmic ³⁹ phenomena involving black holes and neutron stars [4].⁴⁰ These neutrinos are detected by the charged particles, often ⁴¹ a muon, produced in their interaction with the rock or ice ⁴² near the detector.

The detector, roughly one cubic kilometer in size, is 44 located near the geographic South Pole and is buried at 45 depths 1.5-2.5 km in the Antarctic ice [6]. The detector is 46 illustrated in Figure 1 and a more complete description is 47 given in Section 2.

This manuscript describes an improvement in the recon-49

struction algorithm used to generate the initial track position and direction of detected muons in the IceCube detector. We achieve this improvement in accuracy with the addition robust statistical techniques to the reconstruction algorithm.

2 Background

The IceCube detector is composed of 5,160 optical detectors, each composed of a photomultiplier tube (PMT) and onboard digitizer [8]. The PMTs are spread over 86 vertical strings arranged in a hexagonal shape, with a total instrumented volume of approximately one cubic kilometer. The PMTs on a given string are separated vertically by 17 m, and the string-to-string separation is roughly 125 m.

When a neutrino enters the telescope, it sometimes interacts with the ice and generates a muon. As the muon travels though the detector, it radiates light [10], which is observed by the PMTs and divided into discrete *hits* [7]. A collection of hits is called an *event*, and when the number of hits in an event is sufficiently large, the muon track reconstruction algorithm is triggered.

2.1 Cosmic Ray Muons

35

In addition to neutrinos, muons can also be generated by cosmic rays. One of the simpler techniques used to separate neutrino muons from cosmic ray muons is reconstructing the muon track and determining whether the muon was traveling downwards into the Earth or upwards out of the Earth. Since neutrinos can penetrate the Earth but cosmic ray muons cannot, it follows that a muon traveling out of the Earth must have been generated by a neutrino. Thus, by selecting only the muons that are reconstructed as up-going, the neutrino muons can, in principle, be identified.

While separation is possible in principle, the number of observed cosmic ray muons exceeds the number of observed neutrino muons by more than five orders of magnitude [5]. Thus, high-accuracy reconstructions are

¹See special section in these proceedings

²Dept. of Computer Sciences, University of Wisconsin, Madison, WI 53706, USA.

100

112

118

140

141

142

ICRG3

critical for preventing erroneously reconstructed cosmic ray 98 muons from dominating the neutrino analysis.

2.2 Challenges in Neutrino Detection

50

51

52

53

55

57

58

60

61

62

63

64

65

70

71

72

73

74

75

76

77

78

79

80

81

82

83

86 87

88

89

90

91

92

93

94

95

96

There are several challenges for the reconstruction algo-¹⁰¹ rithms used in the detector.

Modeling Difficulties The underlying physics of the sys¹⁰⁴ tem are nontrivial to model. The muon's light is scattered¹⁰⁵ by the dust impurities and air bubbles in the ice medium.¹⁰⁶ This scattering cannot be analytically well-approximated,¹⁰⁷ and the scattering properties of the ice vary with depth [11].¹⁰⁸ These challenges make it difficult to design a complete mod-¹⁰⁹ el of the muon's light scattering.

Noise The outliers inherent in the data present an addi¹¹³ tional challenge. The PMTs are so sensitive to light that they can record hits from the radioactive decay in the sur-115 rounding glass [9].

Computational Constraints Reconstruction algorithms¹¹⁹ need to be efficient enough to process about 3,000 muons₁₂₀ per second with the computing resources available at the₁₂₁ South Pole. Thus, algorithms with excessive computational₁₂₂ demands are disfavored.

2.3 Prior IceCube Software

Starting with the positions and times of each hit, the detecton²⁵ reconstructs the muon track. Once the data is collected, it is²⁶ passed through a series of filters that removes hits isolated²⁷ in space and time [1].

After removing outliers, the data is processed using a^{128} simple reconstruction algorithm, *linefit*, which finds the left track that minimizes the sum of the squares of the distances between the track and the hits. More formally, assumelist there are N hits; denote the position and time of the i^{th} hit as $(\vec{x}_i, t_i) \in \mathbb{R}^3 \times \mathbb{R}$. Let the muon have a reconstructed velocity of \vec{v} , and let (\vec{x}_0, t_0) be a point on the reconstructed track. The linefit reconstruction solves the *least-squares* optimization problem

$$\min_{t_0, \vec{x}_0, \vec{v}} \sum_{i=1}^{N} \rho_i(t_0, \vec{x}_0, \vec{v})^2, \tag{1}_{139}^{138}$$

s where

$$\rho_i(t_0, \vec{x}_0, \vec{v}) = \|\vec{v}(t_i - t_0) + \vec{x}_0 - \vec{x}_i\|_2, \qquad (2)_{144}^{143}$$

where $\|\cdot\|_2$ is the 2-norm.

The linefit reconstruction is primarily used to generate an initial track to be used as a *seed* to a more sophisticated reconstruction.

The reconstruction algorithm for the sophisticated₄₄₇ reconstruction is *Single-Photo-Electron-Reconstruction* (*SPE*) [5]. SPE takes the result of the least-squares recon⁴⁴⁸ struction and event data, and uses a likelihood maximiza₁₄₉ tion algorithm to reconstruct the muon track. The SPE re₁₅₀ construction typically takes about two orders of magnitude₁₅₁ more time to compute than linefit. The complete reconstruct⁴⁵² tion process is outlined in Figure 2.

3 Improvements to Muon Track Reconstruction

We now discuss the improvements we have made to the reconstruction algorithm. By augmenting the reconstruction algorithm using robust data analysis techniques, we improve the reconstruction algorithm's accuracy.

3.1 Algorithm Improvement

The accuracy of the SPE reconstruction is dependent on the accuracy of the seed. Given a seed that is inaccurate by 6° or more, SPE often cannot recover, and can produce a reconstruction result that is inaccurate by 6° or more. In addition, the likelihood space for the SPE reconstruction can contain multiple local maxima, so improving the accuracy of a seed already near the true solution will improve the accuracy of the SPE reconstruction . Thus, we focused our work on improving the quality of the seed.

As the muon travels though the detector, it generates hits. As indicated in Equation 1, linefit fits a line to these hits, weighting each hit quadratically in its distance from this line. This quadratic weighting makes the reconstruction result sensitive to outliers. There are two reasons why outliers may appear far from the muon track:

- 1. Some of the photons can scatter in the ice and get delayed by more than a microsecond. When these scattered photons are recorded by a PMT, the muon will be over 300 m away, so these photons are no longer useful indicators of the muon's position.
- 2. While the noise reduction filters remove most of the outlier noise, the noise hits that survive are unrelated to the muon.

To solve the outlier problem we made two changes: improve the modeling of the scattering and replace the least-squares optimization problem with a robust line-fitting algorithm.

3.1.1 Improving the Scattering Model

The least-squares model does not model the scattering. Thus, hits generated by photons that scattered for a significant length of time are not useful predictors of the muon's position within this model. We found that a filter could identify these scattered hits, and improve accuracy by almost a factor of two by removing them prior to performing the fit.

A hit (\vec{x}_i, t_i) is considered a scattered hit if there exists a neighboring hit (\vec{x}_j, t_j) that is within a distance of r and has a time coordinate that is earlier than t_i by an amount of time given by t. If (\vec{x}_i, t_i) is a scattered hit, it is filtered out.

More formally, let H be the set of all hits for a particular event. Then, we define the scattered hits as

$$\{(\vec{x}_i, t_i) \mid \exists (\vec{x}_j, t_j) \in H : ||\vec{x}_i - \vec{x}_j||_2 \le r \text{ and } t_i - t_j \ge t \}.$$
(3)

Optimal values of r and t were found to be 156 m and 778 ns, respectively.

3.1.2 Adding Robustness to the Model

As described in Section 2.3, the least-squares model gives all hits quadratic weight, whereas we would like to limit the weight of the outliers. Some models in classical statistics marginalize the weight of outliers. We experimented with replacing the least-squares model with a variety of robust



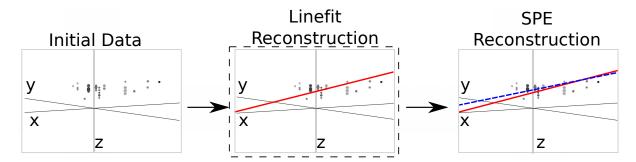


Fig. 2: The reconstruction pipeline used to process data in the IceCube detector. Each point indicates a PMT that recorded a photon (PMTs that recorded nothing are omitted). After initial data is collected and passed though some noise filters, the data is processed by a linefit (solid line), which is used as the seed for the SPE (dashed line). The SPE reconstruction is then evaluated as a potential neutrino. Our work on the reconstruction problem makes changes to the linefit reconstruction algorithm (indicated by the dashed box).

models: a deadzone-linear fit, a one-norm fit, and a Huben90 reconstruction [3].

Of the models that we tested, the Huber penalty function $_{192}$ gave the greatest increase in reconstruction accuracy. We replace Equation 1 with the optimization problem:

$$\min_{t_0, \vec{x}_0, \vec{v}} \sum_{i=1}^{N} \phi(\rho_i(t_0, \vec{x}_0, \vec{v})), \tag{4}_{\texttt{h96}}$$

where the Huber penalty function $\phi(\rho)$ is defined as

$$\phi(\rho) \equiv \begin{cases} \rho^2 & \text{if } \rho < \mu \\ \mu(2\rho - \mu) & \text{if } \rho \ge \mu \end{cases} . \tag{5}_{201}^{200}$$

Here, $\rho_i(t_0, \vec{x}, \vec{v})$ is defined in Equation 2 and μ is a constant calibrated to the data (for this application, the optimal value of μ is 153 m).

The Huber penalty function has two regimes. In the near-hit regime ($\rho < \mu$), hits are assumed to be strongly correlated with the muon's track, and the Huber penalty function behaves like least squares, giving point quadratic weight. In the far-hit regime ($\rho \ge \mu$), the Huber penalty function gives points a weaker linear weight, as they are more likely to be noise.

In addition to its attractive robustness properties, the Huber reconstruction's weight assignment also has the added benefit that it inherently labels points as outliers (those with $\rho \geq \mu$). Thus, once the Huber reconstruction is computed, we can go one step further and simply remove the labeled outliers from the dataset. A better reconstruction is then obtained by computing the least-squares reconstruction on the data with the outliers removed.

3.1.3 Implementation

Our scattering filter has a worst-case complexity that is quadratic in the number of PMTs that recorded a hit, but this is typically only between 10 and 100 PMTs. Unlike linefit, the Huber regression does not have a closed form solution, and thus must be solved iteratively. We use an alternating direction method of multipliers [2] to implement the Huber regression.

3.2 Results

We now present our empirical results, which validate our changes to the linefit. We also present our runtime performance results.

3.2.1 Accuracy Improvement

Our goal is to improve the accuracy of the reconstruction in order, and to better separate neutrinos from cosmic rays. Thus we present three measurements: (1) the accuracy change between linefit and the new algorithm, (2) the accuracy change when SPE is seeded with the new algorithm, and (3) the improvement in separation between neutrinos and cosmic rays.

To measure the accuracy improvement, we use the metric of *median angular resolution* θ_{med} , which is the arc distance between the reconstruction and the simulated true track. Our dataset is simulated neutrino data designed to be similar to that observed at the Pole. We find that we can improve the median angular resolution of the simple reconstruction by 57.6%, as shown in Table 1.

Table 1: Median angular resolution (degrees) for reconstruction improvements. The first line is the accuracy of the prior least-squares model, and the subsequent lines are the accuracy measurements from cumulatively adding improvements into the simple reconstruction algorithm.

Algorithm	θ_{med} (°)
Linefit Reconstruction (Least-Squares)	9.917
With Addition of Scattering Filter	5.205
With Addition of Huber Regression	4.672
With Addition of Outlier Removal	4.211

We also find that seeding the SPE reconstruction with the improved simple reconstruction generates an improvement in the angular resolution of 12.9%, and that these improvements in the reconstruction algorithm result in 10% fewer atmospheric muons erroneously reconstructed as up-going, and 1% more muons correctly reconstructed as up-going.

3.2.2 Runtime Performance

We now report the runtime of our implementation, which is written in C++. The individual mean runtime of each component of the new algorithm is presented in Table 2. As shown, our new algorithm is more computationally demanding than linefit, but only by approximately a factor of six.

Table 2: The mean runtime for each component of the new simple reconstruction, contrasted with the mean runtime of the original linefit. As shown, the total runtime is approximately six times that of the original linefit.

Algorithm	Runtime (μs)
Linefit Reconstruction (Least-Squares)	24.2
Scattering Filter	56.6
Huber Regression	47.5
Outlier Removal	51.8

Conclusions 4

218

220

221

222

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

242

243

244

245

246

247

248

249

250

251

252

253

254

255

256

257

258

259

260

261

262

Muon track detection is a challenging problem in the Ice-219 Cube detector. We achieve a 13% improvement in reconstruction accuracy with the addition of a scattering filter, and a more robust line-fitting algorithm. We achieve these results with a reconstruction algorithm that is only 6 times 223 slower than the previous algorithm. Our reconstruction software runs at the South Pole in the detector, and is included in all IceCube analyses.

References

- [1] Markus Ackermann. Searches for signals from cosmic point-like sources of high energy neutrinos in 5 years of AMANDA-II data. PhD thesis, Humboldt-Universität zu Berlin, 2006.
- [2] Stephen Boyd, Neal Parikh, Eric Chu, Borja Peleato, and Jonathan Eckstein. Distributed optimization and statistical learning via the alternating direction method of multipliers. Foundations and Trends in Machine Learning, 3(1):1–122, 2011.
- [3] Stephen Boyd and Lieven Vandenberghe. *Convex* Optimization. Cambridge University Press, 2009.
- [4] IceCube Collaboration. IceCube webpage. http://icecube.wisc.edu/.
- [5] IceCube Collaboration. Muon track reconstruction and data selection techniques in AMANDA. Nuclear Instruments and Methods in Physics Research Section A, 524:169–194, May 2004.
- [6] IceCube Collaboration. First year performance of the IceCube neutrino telescope. Astroparticle Physics, 26(3):155–173, 2006.
- [7] IceCube Collaboration. The icecube data acquisition system: Signal capture, digitization, and timestamping. Nuclear Instruments and Methods in Physics Research Section A, 601(3):294–316, 2009.
- [8] IceCube Collaboration. Calibration and characterization of the IceCube photomultiplier tube. Nuclear Instruments and Methods in Physics Research Section A, 618:139–152, June 2010.
- [9] IceCube Collaboration. IceCube sensitivity for lowenergy neutrinos from nearby supernovae. Astronomy & Astrophysics, 535(A109):18, November 2011.
- [10] IceCube Collaboration. An improved method for measuring muon energy using the truncated mean of dE/dx. Nuclear Instruments and Methods in Physics Research Section A, 2012.
- [11] Martin Wolf and Elisa Resconi. Verification of South 263 Pole glacial ice simulations in IceCube and its 264 relation to conventional and new, accelerated photon 265 tracking techniques. Master's thesis, Max-Planck-266 Institut für Kernphysik Heidelberg, September 2010. 267